

PRODUCT FEATURES

FIXTURE HOUSING


Width: 3.0" Height: 3.5"

ONE-PIECE EXTRUDED ALUMINUM HOUSING

Housing ensures straighter rows and consistent lens retention

120/277VAC 0-10 VOLT DIMMING TO 1% STANDARD

UP TO 136.7 LUMENS PER WATT AT 90 CRI

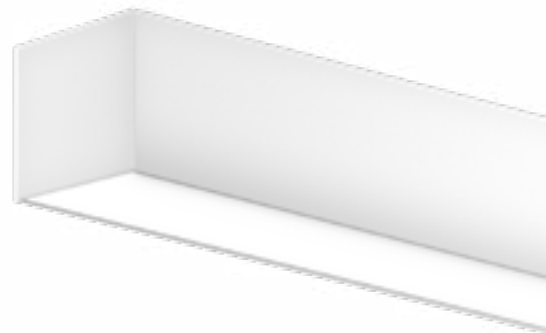

ORDERING GUIDE EX: 3W - 20 - HD - 30 - UNV - WH - C90

SERIES	LENGTH	OUTPUT				CCT	VOLTAGE	FINISH
3W	XX FT	VHD	1250 LM/FT	LD	500 LM/FT	30 3000K	UNV 120-277V	WH White
	1' Increments EX: 20' = 20	HD	1000 LM/FT	VLD	250 LM/FT	35 3500K	347' 347V	BLK Black
		MD	750 LM/FT	CD	Custom	40 4000K		

ORDERING NOTES

- EM NOT AVAILABLE WITH 347V.
- EM AND SENSORS ARE NOT AVAILABLE WITH 2' AND 3' FIXTURES.
- FOR INDIVIDUAL FIXTURES, SENSOR LOCATED AT POWER FEED END. FOR RUNS, A SENSOR IS INSTALLED INTO EACH FIXTURE IN RUN, EX: 2 SENSORS ARE INSTALLED IN A 16' RUN (1 SENSOR IN EACH 8' FIXTURE).

OPTIONS

CRI	INTEGRATED CONTROLS ^{2, 3, 4}	OPTICAL	FOR INDIVIDUALS	FOR LINEAR RUNS ^{6, 7}
C90				EM
C90 90 CRI	DOS Daylight Occupancy Sensor DALI DRIVER STANDARD	BLANK = LAMBERTIAN	EM ² Emergency Battery CEC LISTED	EMERGENCY BATTERY PACK QUANTITY PER RUN ⁶ POSITION IN RUN ⁷
		WW ⁵ Wall Wash, Direct	EC Emergency Circuit	EC EMERGENCY CIRCUIT QUANTITY PER RUN ⁶ POSITION IN RUN ⁷

EMERGENCY OPTION NOTES

- CONSULT FACTORY FOR COMPONENT OR SYSTEM NOT LISTED.
- EM AND EC POSITION REFERS TO WHICH FIXTURE IN THE RUN THAT WILL BE POWERED BY THE EM/EC CIRCUIT. POSITION OPTIONS: S=STARTER, J=JOINER, E=ENDER
EX: 3W-20-HD-35-UNV-WH-EM2SJ

STARTER	JOINER	ENDER
---------	--------	-------

PHOTOMETRICS

3W-04-HD-35-UNV-XX-C90

Total Lumens: 3,999

Ratio: 0% Up & 100% Down


Wattage: 32.0

Efficacy: 124.9 LM/W

Fixture Length: Four Feet

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1136.0	28.4
0 - 40	1828.8	45.7
0 - 60	3145.9	78.7
0 - 90	3997.3	99.9
90 - 180	2.09	0.1
0 - 180	3999.4	100.0

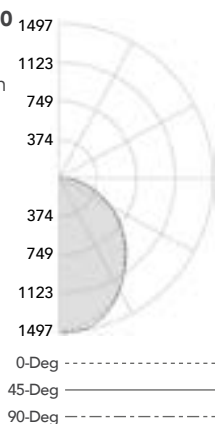

3W-04-HD-35-UNV-XX-C90-WW

Total Lumens: 4,057

Ratio: 0% Up & 100% Down


Wattage: 32.0

Efficacy: 126.7 LM/W

Fixture Length: Four Feet

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1302.7	32.1
0 - 40	2069.4	51.0
0 - 60	3396.3	83.7
0 - 90	4056.4	100.0
90 - 180	0.23	0.0
0 - 180	4056.6	100.0

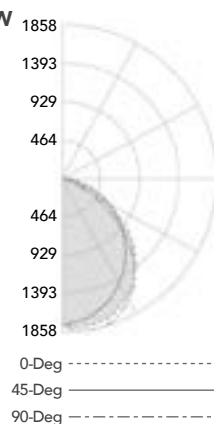

ENERGY CONSUMPTION

WATTS PER LINEAR FOOT

DIRECT (LAMBERTIAN) LIGHT, 90 CRI, 3500K

	VHD	HD	MD	LD	VLD
W/FT	10.4	8.0	5.9	3.9	2.0
LM/FT	1255	999	755	499	268
LM/W	120.7	124.9	128.0	127.9	136.7

DIRECT (WALL WASH) LIGHT AT 90 CRI

	VHD	HD	MD	LD	VLD
W/FT	10.4	8.0	5.9	3.9	2.0
LM/FT	1274	1014	766	506	272
LM/W	122.5	126.7	129.9	129.9	138.8

LUMEN ADJUSTMENT CALCULATIONS

LUMEN MULTIPLIERS	
3000K	0.995
4000K	1.023

Example: MD, 3000K at 90CRI

Light Output: 3020 x 0.995 = 3004 lm

Light Output/ft: 755 x 0.995 = 752 lm/ft

Efficacy = 751 / 5.9 = 127.2 lm/W

OPERATION

Light Engine:

The 3W is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 90+.

Optics:

The back lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

Optional Wall Wash:

Asymmetric extruded aluminum reflector with recessed extruded acrylic lens. Designed to be installed on the wall with light directed back into the room.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The 3W comes standard with 0-10V dimming to 1%. For DOS (Daylight/ Occupancy Sensor) ordering code, DALI driver required. Advance Xitanium SR, 1% dimming to be utilized.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. Standard battery is CEC Listed. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) Year limited warranty from date of shipment.

Lumen Maintenance:

Rated for 85% initial lumen output at 90,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certification:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Shipping:

2 week lead time for White (WH) or Black (BLK) finish orders up to 1000 feet. Lead time for orders greater than 1000' will be determined at time of order.

Manufactured in the USA:

All ALL Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.

On Site Installation Notes:

Fixtures will be supplied with the appropriate hardware kits to join two fixtures together for specified on-site row(s) length.

MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

Alignment/Assembly:

The alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, while a draw-screw secures housing-to-housing attachment. Additional alignment biscuits double as the light shields.

Lengths:

The 3W is available in a minimum 2-foot (nominal) length with additional 1-foot increments available ($\pm 0.030"$, $\pm 0.50"$). Longer fixture rows are available and will be configured with 4-foot, 5-foot, 6-foot, 7-foot, and 8-foot fixtures. Maximum run length on one power feed is 72'. Continuous runs over 72' will require a second feed.

Mounting Method/Hardware:

Standard mounting hardware includes a galvanized wall cleat with side to side adjusting for final alignment. Position all Junction Boxes in accordance with the Fixture Row Layouts found on pages 3-5. Feed Point is on the left hand mounting point for all products longer than 2'; All 2' products have a center feed point.

Exterior Finish:


The 3W is available in White and Black polyester powder coat finish to ensure durability.

Integrated Controls:

The 3W is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section. Philips EasySense is standard daylight/ occupancy sensor. DALI driver required. If your project requires a component or system not listed, please contact your local American Linear Lighting representative.


MANUFACTURER	ORDERING CODE	SENSOR	CONNECTION	DRIVER
Philips EasySense	DOS	Daylight/PIR Occupancy	Wireless	DALI (Advanced Xitanium SR, 1% Dimming)

MOUNTING DETAILS




APPLICATION DETAILS

WALL WASH




FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 3' - 4' - 5' - 6' - 7' - 8' - 9' - 10' - 11' - 12'

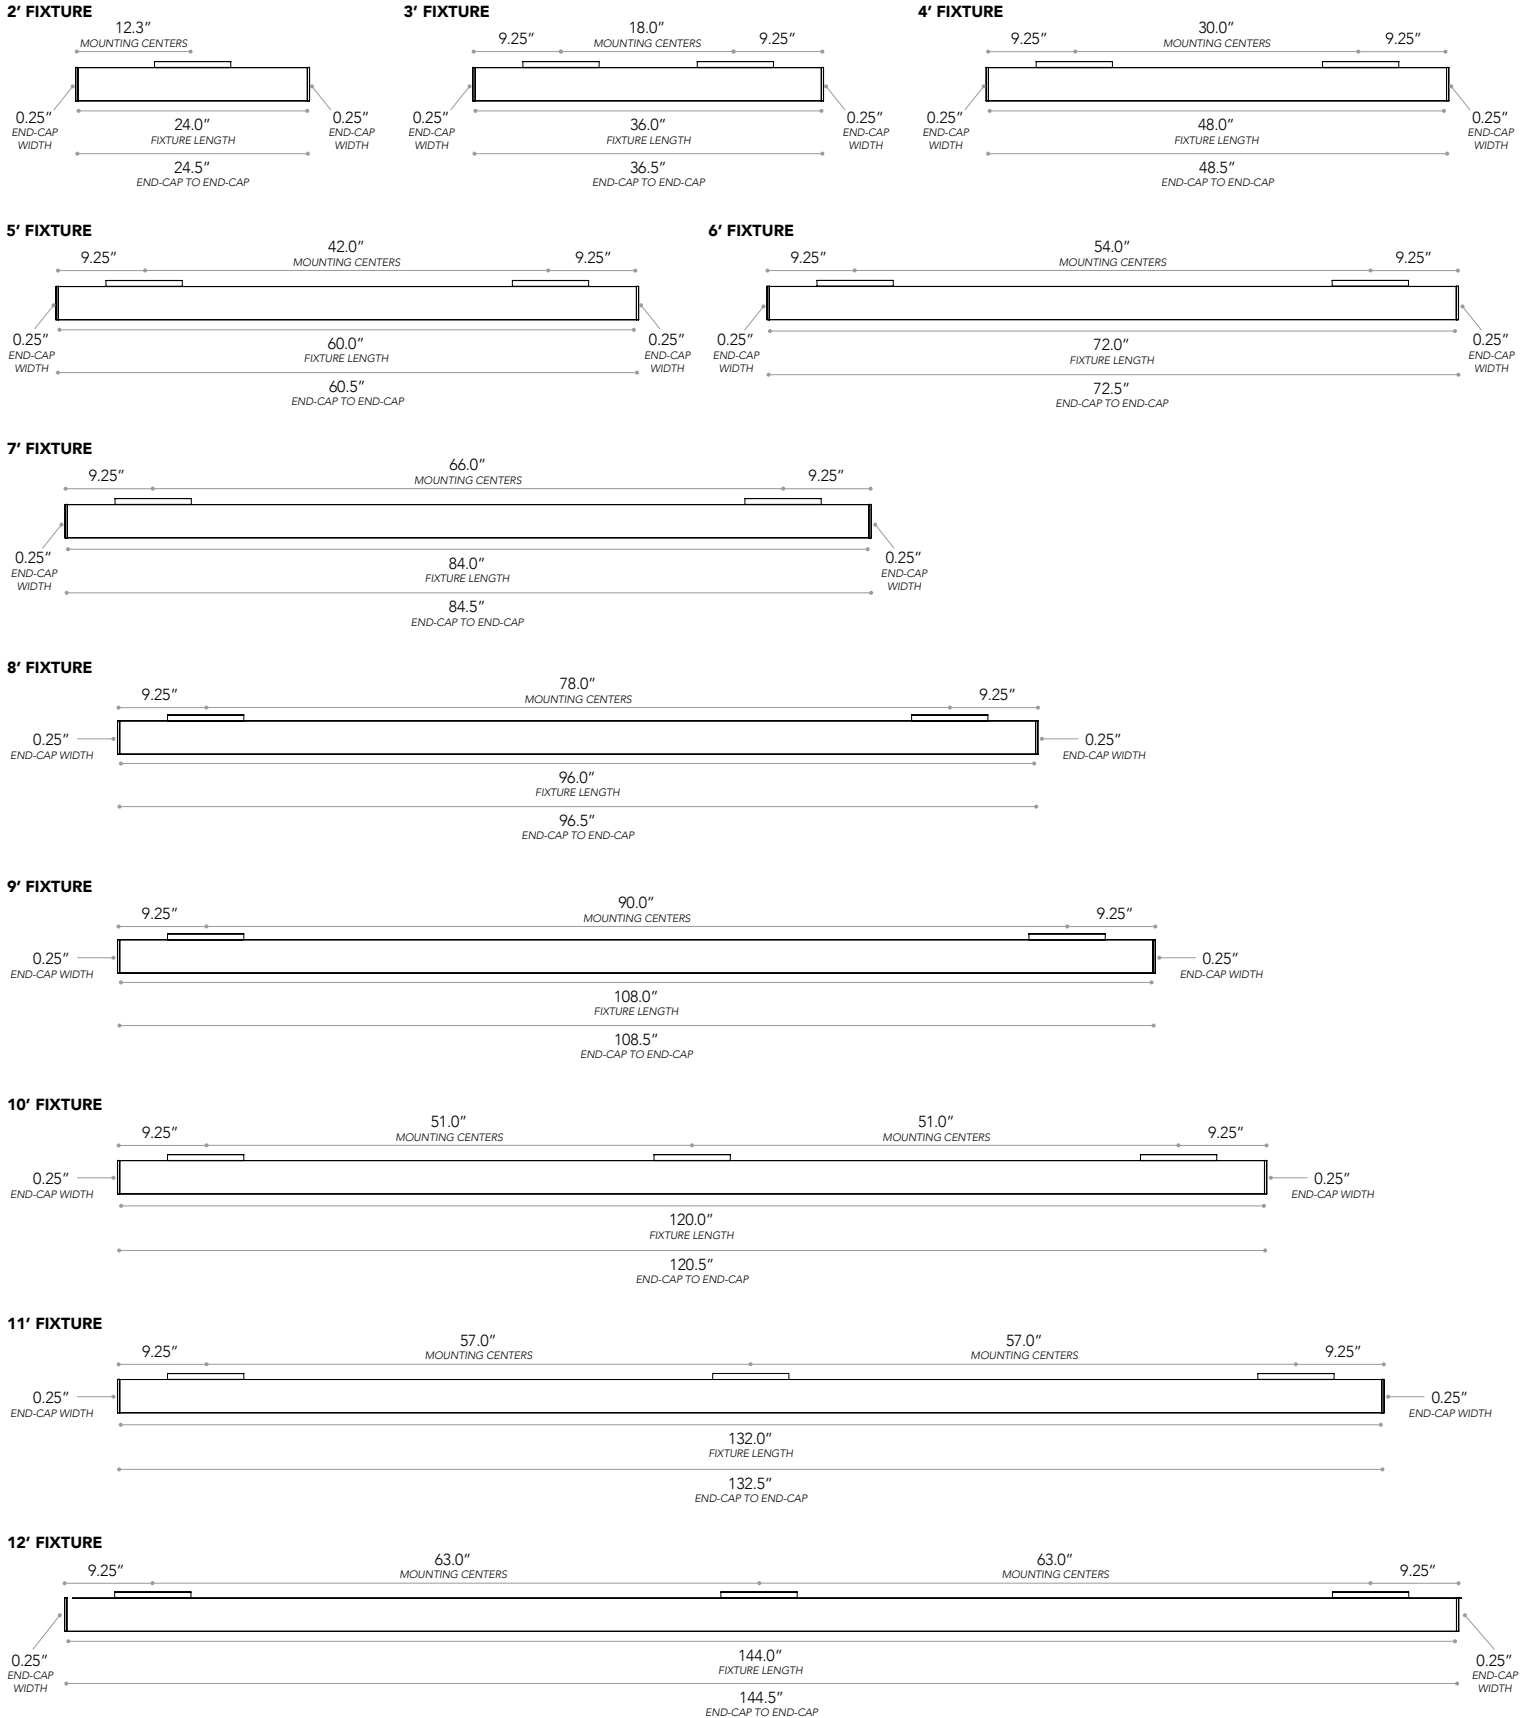


FIXTURE ROW LAYOUT: TWO UNITS 14' - 16'

14' FIXTURE

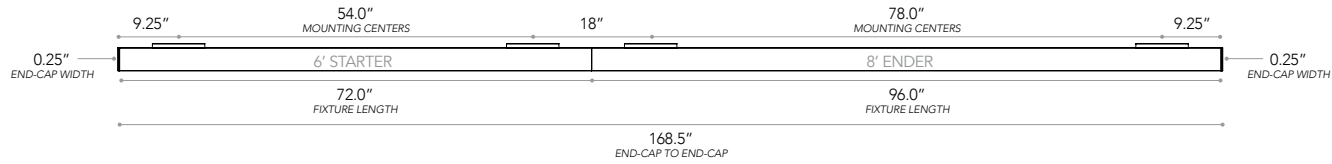


16' FIXTURE

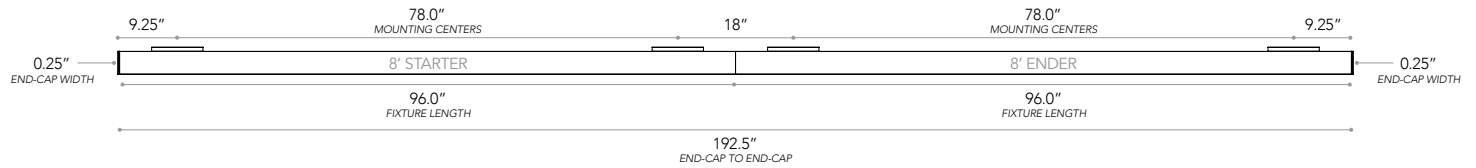


FIXTURE ROW LAYOUT: THREE UNITS 18' - 20' - 22' - 24'


18' FIXTURE

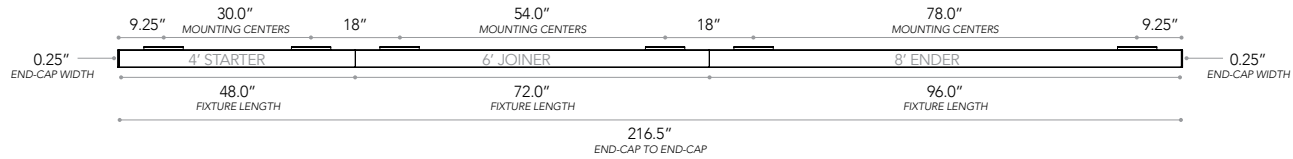


20' FIXTURE

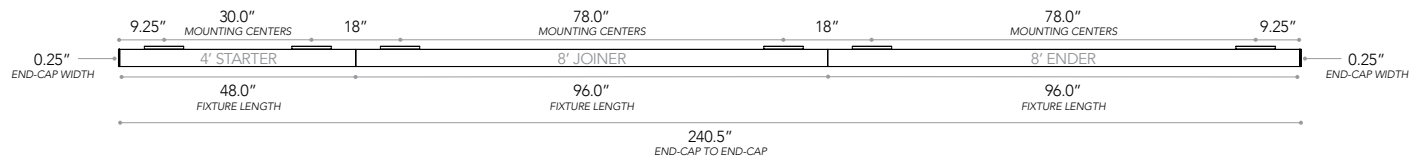

22' FIXTURE

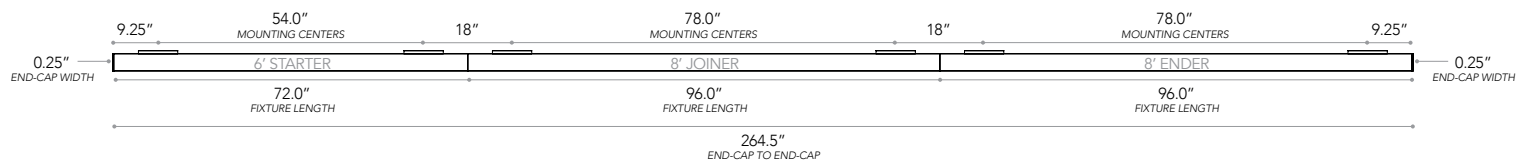


24' FIXTURE

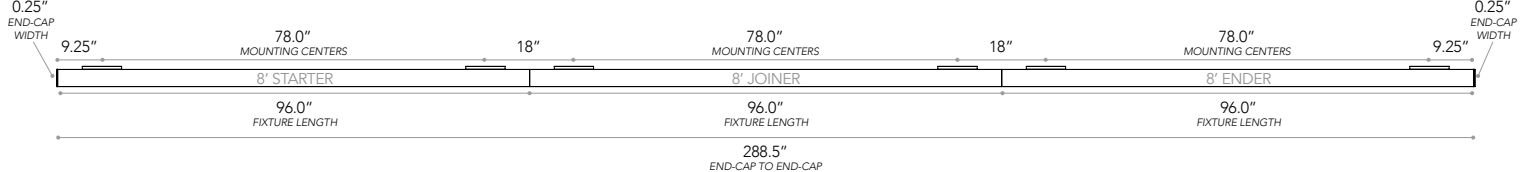

FIXTURE ROW COMPONENTS

RUN LENGTH	FIXTURE LENGTHS									JOINER KITS
	STARTER	JOINER							ENDER	
	1	2	3	4	5	6	7	8	9	
13'	5'	-	-	-	-	-	-	-	8'	1
14'	6'	-	-	-	-	-	-	-	8'	1
15'	7'	-	-	-	-	-	-	-	8'	1
16'	8'	-	-	-	-	-	-	-	8'	1
17'	3'	6'	-	-	-	-	-	-	8'	2
18'	4'	6'	-	-	-	-	-	-	8'	2
19'	5'	6'	-	-	-	-	-	-	8'	2
20'	4'	8'	-	-	-	-	-	-	8'	2
21'	5'	8'	-	-	-	-	-	-	8'	2
22'	6'	8'	-	-	-	-	-	-	8'	2
23'	7'	8'	-	-	-	-	-	-	8'	2
24'	8'	8'	-	-	-	-	-	-	8'	2
25'	5'	6'	6'	-	-	-	-	-	8'	3
26'	4'	6'	8'	-	-	-	-	-	8'	3
27'	5'	6'	8'	-	-	-	-	-	8'	3
28'	4'	8'	8'	-	-	-	-	-	8'	3
29'	5'	8'	8'	-	-	-	-	-	8'	3
30'	6'	8'	8'	-	-	-	-	-	8'	3
31'	7'	8'	8'	-	-	-	-	-	8'	3
32'	8'	8'	8'	-	-	-	-	-	8'	3
33'	5'	6'	6'	8'	-	-	-	-	8'	4
34'	4'	6'	8'	8'	-	-	-	-	8'	4
35'	5'	6'	8'	8'	-	-	-	-	8'	4
36'	4'	8'	8'	8'	-	-	-	-	8'	4
37'	5'	8'	8'	8'	-	-	-	-	8'	4
38'	6'	8'	8'	8'	-	-	-	-	8'	4
39'	7'	8'	8'	8'	-	-	-	-	8'	4
40'	8'	8'	8'	8'	-	-	-	-	8'	4
41'	5'	6'	6'	8'	8'	-	-	-	8'	5
42'	4'	6'	8'	8'	8'	-	-	-	8'	5
43'	5'	6'	8'	8'	8'	-	-	-	8'	5
44'	4'	8'	8'	8'	8'	-	-	-	8'	5
45'	5'	8'	8'	8'	8'	-	-	-	8'	5
46'	6'	8'	8'	8'	8'	-	-	-	8'	5
47'	7'	8'	8'	8'	8'	-	-	-	8'	5
48'	8'	8'	8'	8'	8'	-	-	-	8'	5
49'	5'	6'	6'	8'	8'	8'	-	-	8'	6
50'	4'	6'	8'	8'	8'	8'	-	-	8'	6
51'	5'	6'	8'	8'	8'	8'	-	-	8'	6
52'	4'	8'	8'	8'	8'	8'	-	-	8'	6
53'	5'	8'	8'	8'	8'	8'	-	-	8'	6
54'	6'	8'	8'	8'	8'	8'	-	-	8'	6
55'	7'	8'	8'	8'	8'	8'	-	-	8'	6
56'	8'	8'	8'	8'	8'	8'	-	-	8'	6
57'	5'	6'	6'	8'	8'	8'	8'	-	8'	7
58'	4'	6'	8'	8'	8'	8'	8'	-	8'	7
59'	5'	6'	8'	8'	8'	8'	8'	-	8'	7
60'	4'	8'	8'	8'	8'	8'	8'	-	8'	7
61'	5'	8'	8'	8'	8'	8'	8'	-	8'	7
62'	6'	8'	8'	8'	8'	8'	8'	-	8'	7
63'	7'	8'	8'	8'	8'	8'	8'	-	8'	7
64'	8'	8'	8'	8'	8'	8'	8'	-	8'	7
65'	5'	6'	6'	8'	8'	8'	8'	8'	8'	8
66'	4'	6'	8'	8'	8'	8'	8'	8'	8'	8
67'	5'	6'	8'	8'	8'	8'	8'	8'	8'	8
68'	4'	8'	8'	8'	8'	8'	8'	8'	8'	8
69'	5'	8'	8'	8'	8'	8'	8'	8'	8'	8
70'	6'	8'	8'	8'	8'	8'	8'	8'	8'	8
71'	7'	8'	8'	8'	8'	8'	8'	8'	8'	8
72'	8'	8'	8'	8'	8'	8'	8'	8'	8'	8

	FIXTURE LENGTH	CENTER-TO-CENTER BRACKET SPACING
3'	36.0"	18.0"
4'	48.0"	30.0"
5'	60.0"	42.0"
6'	72.0"	54.0"
7'	84.0"	66.0"
8'	96.0"	78.0"

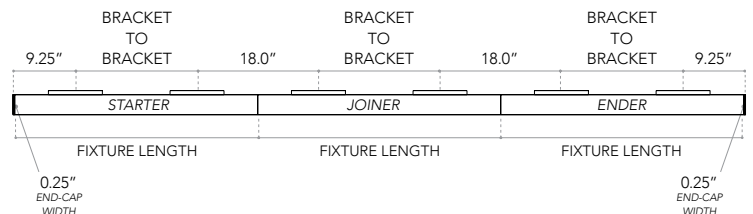

Note 1: 2' fixtures use a single mounting bracket centered on the fixture

Note 2: 10', 11', and 12' fixtures have a third mounting bracket centered on the fixture