



DATE

PROJECT

COMMENTS


PRODUCT FEATURES

FIXTURE HOUSING
Width: 5.0" Height: 3.5"

ONE-PIECE EXTRUDED ALUMINUM HOUSING
Housing ensures straighter rows and consistent lens retention

120/277VAC 0-10 VOLT DIMMING TO 1% STANDARD

UP TO 141.4 LUMENS PER WATT

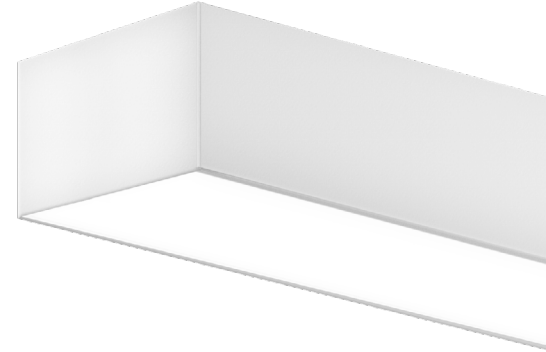

ORDERING GUIDE EX: 5C - 20 - HD - 30 - UNV - WH - EM

| SERIES | LENGTH | OUTPUT | CCT | VOLTAGE | FINISH |
|--------|-------------------------------|----------------|----------|--------------|-----------|
| 5C | XX FT | VHD 1250 LM/FT | 30 3000K | UNV 120-277V | WH White |
| | 2' Increments Ex: 20' = 20 | HD 1000 LM/FT | 35 3500K | 347' 347V | BLK Black |
| | | MD 750 LM/FT | 40 4000K | | |
| | | LD 500 LM/FT | | | |
| | | VLD 250 LM/FT | | | |
| | | CD Custom | | | |

ORDERING NOTES


- EM NOT AVAILABLE WITH 347V.
- EM NOT AVAILABLE WITH 2' FIXTURES.
- FOR INDIVIDUAL FIXTURES, SENSOR LOCATED AT POWER FEED END. FOR RUNS, A SENSOR IS INSTALLED INTO EACH FIXTURE IN RUN, EX. 2 SENSORS ARE INSTALLED IN A 16 FT RUN (1 SENSOR IN EACH 8 FT FIXTURE)

OPTIONS

| CRI | INTEGRATED CONTROLS ³ | FOR INDIVIDUALS | FOR LINEAR RUNS ^{4,5} |
|-------------------|----------------------------------|-----------------------------------|--------------------------------|
| BLANK = 80 CRI OS | Occupancy Sensor | EM ² Emergency Battery | EM |
| C90 90 CRI | DOS Daylight Occupancy Sensor | EC Emergency Circuit | EC |


EMERGENCY OPTION NOTES

- EM AND EC QUANTITY IS NOT TO EXCEED NUMBER OF DISCRETE FIXTURE SECTIONS IN A ROW.
- EM AND EC POSITION REFERS TO WHICH FIXTURE IN THE RUN THAT WILL BE POWERED BY THE EM/EC CIRCUIT. POSITION OPTIONS: S=STARTER, J=JOINER, E=ENDER
EX: 5C-20-HD-35-UNV-WH-EM2SJ



PHOTOMETRICS

5C-04-HD-35-UNV-XX-X
Total Lumens: 4,090
Ratio: 0% Up & 100% Down
Wattage: 29.3
Efficacy: 139.4 LM/W
Fixture Length: Four Feet

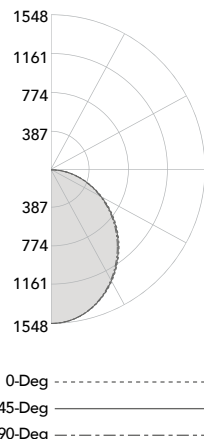

ZONAL LUMEN SUMMARY

| Zone | Lumens | % Fixt |
|----------|--------|--------|
| 0 - 30 | 1164.1 | 28.5 |
| 0 - 40 | 1876.7 | 45.9 |
| 0 - 60 | 3233.9 | 79.1 |
| 0 - 90 | 4089.6 | 100.0 |
| 90 - 180 | 0.6 | 0.0 |
| 0 - 180 | 4090.2 | 100.0 |

ENERGY CONSUMPTION WATTS PER LINEAR FOOT

DIRECT (LAMBERTIAN) LIGHT

| | VHD:1250 | HD:1000 | MD:750 | LD:500 | VLD:250 |
|-------|----------|---------|--------|--------|---------|
| W/FT | 8.8 | 7.3 | 5.5 | 3.6 | 1.8 |
| LM/FT | 1222 | 1022 | 758 | 503 | 249 |
| LM/W | 139.0 | 139.4 | 137.7 | 141.4 | 136.2 |

OPERATION

Light Engine:

The 5C is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 80+. Optional 90+ CRI available.

Optics:

The back-lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The 5C comes standard with 0-10V dimming down to 1%.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) Year limited warranty from date of shipment.

Lumen Maintenance:

Rated for 85% initial lumen output at 75,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment, and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

Alignment/Assembly:

The alignment system employs a six-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, two extended biscuits provide additional strength and a light shield, while two vertical draw-screws secures housing-to-housing attachment.

Lengths:

The 5C is available in a minimum 2-foot (nominal) length with additional 2-foot increments available. Longer fixture rows are available and will be configured per ALL factory specifications; typical rows are configured with 4-foot, 6-foot and 8-foot fixtures. Max run length on one power feed is 72'. Continuous runs over 72' will require 2 power feeds.

Mounting Method/Hardware:

The 5C is available for mounting upon any ceiling type, additional mounting hardware available by others.

Exterior Finish:

The 5C is available in White and Black polyester powder coat finish to ensure durability.

Integrated Controls:

The 5C is available with optional integrated controls. Sensors are conveniently designed to mount in aperture. For individual fixtures, the sensor is located at the power feed end. For runs, each Starter, Joiner and Ender fixture will be supplied with a discrete sensor that will control that specific fixture within the run.

Shipping:

2-Week lead time for orders up to 1,000 Linear Feet.


4-Week lead time for orders with a Black finish.

Lead time for orders greater than 1,000' will be determined at time of order.

Manufactured in the USA:


All ALL Luminaires and Components (except LED boards, drivers, and end caps) are proudly manufactured and assembled in the USA.

MOUNTING DETAILS

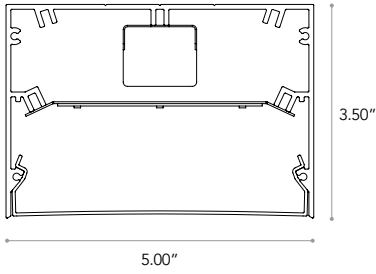


FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 4' - 6' - 8' - 10' - 12'


2' FIXTURE

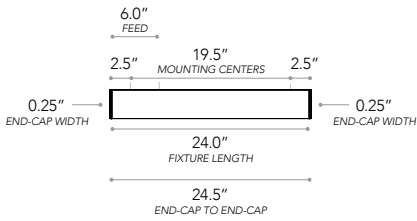


4' FIXTURE

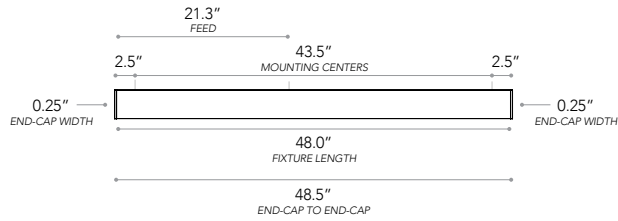


6' FIXTURE

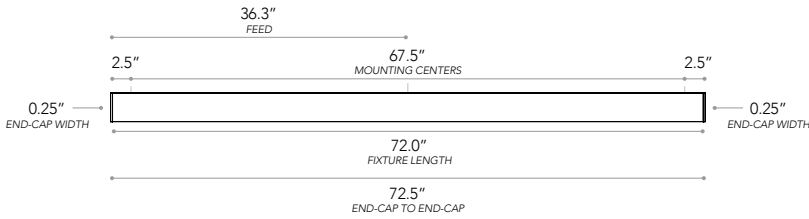


8' FIXTURE

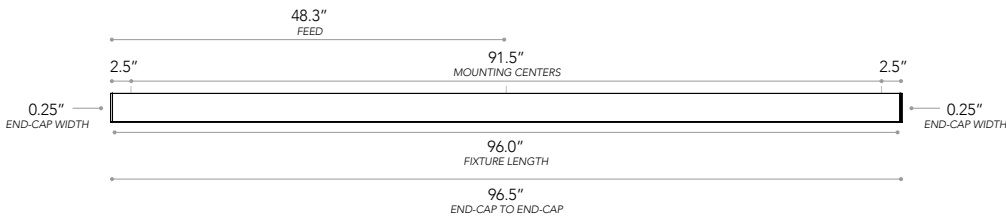

10' FIXTURE

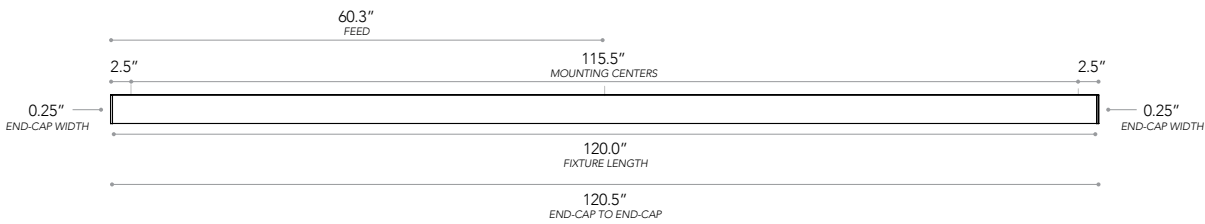


12' FIXTURE

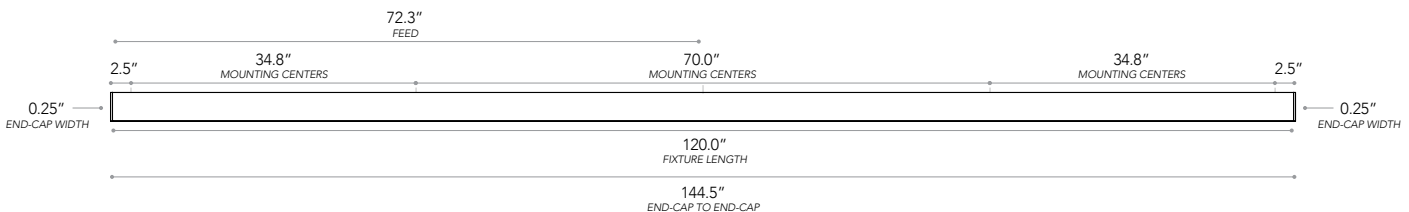


FIXTURE ROW LAYOUT: TWO UNITS 14' - 16'

14' FIXTURE

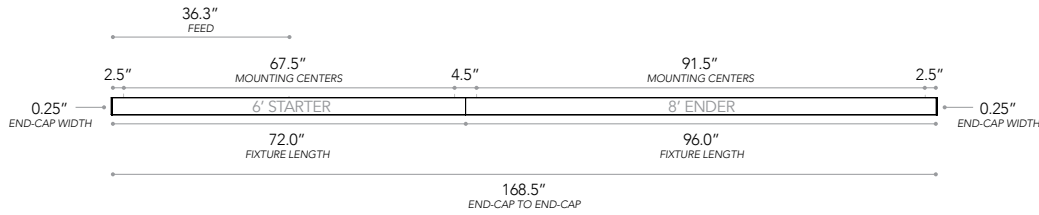


16' FIXTURE

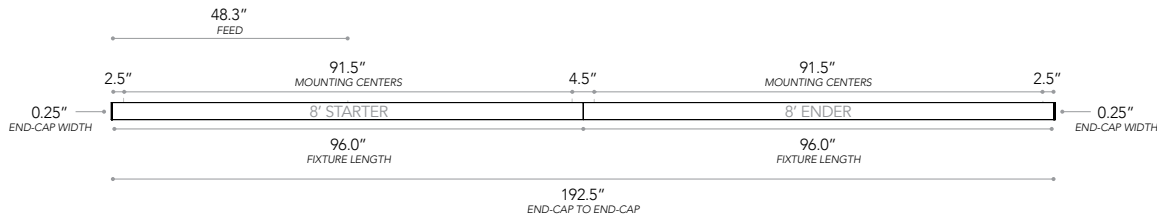


FIXTURE ROW LAYOUT: THREE UNITS 18' - 20' - 22' - 24'


18' FIXTURE

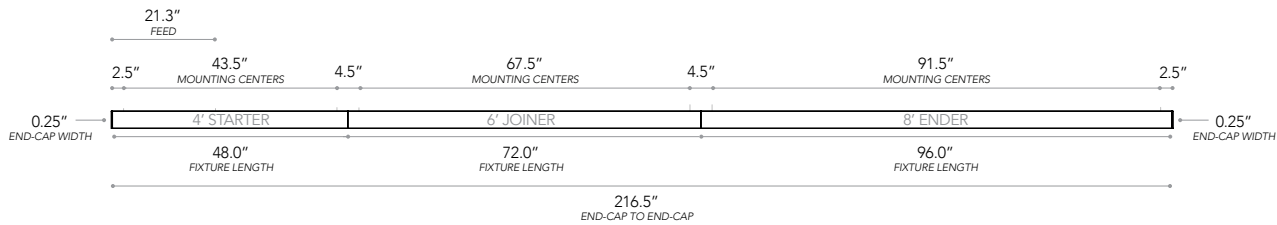


20' FIXTURE

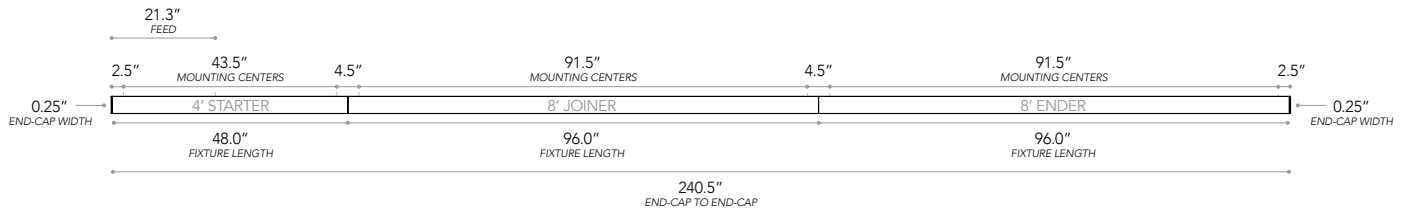

22' FIXTURE

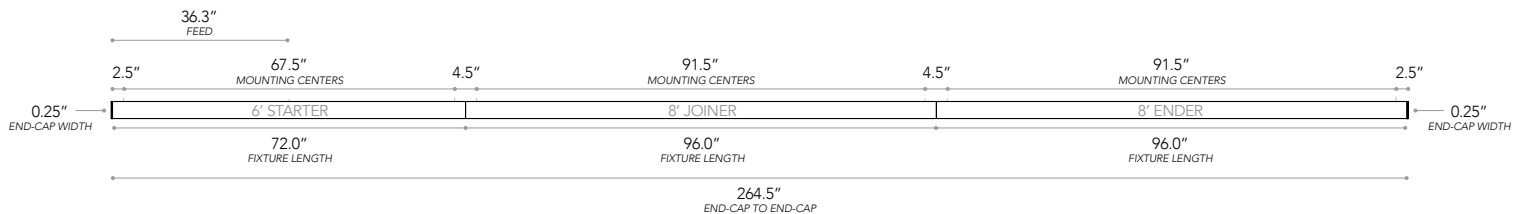

24' FIXTURE

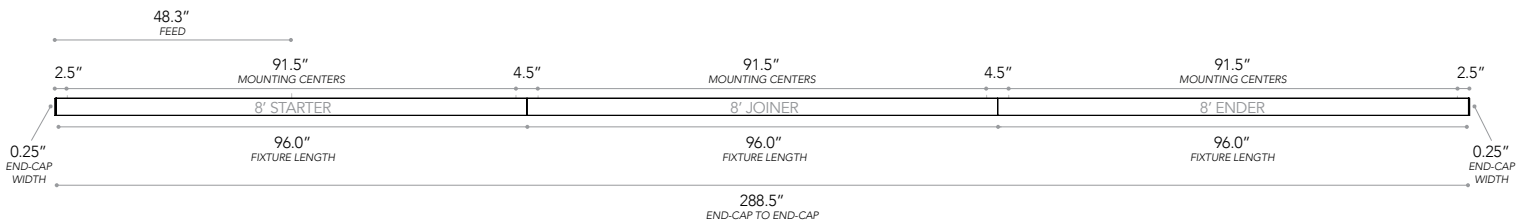

FIXTURE ROW COMPONENTS

| RUN LENGTH (FT) | FIXTURE LENGTHS | | | | | | | | | JOINER KITS | END-CAPS | END-CAP TO END-CAP |
|-----------------|-----------------|--------|----|----|----|----|----|----|----|-------------|----------|--------------------|
| | STARTER | JOINER | | | | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | |
| 14 | 6' | - | - | - | - | - | - | - | 8' | 1 | 2 | 168.5" |
| 16 | 8' | - | - | - | - | - | - | - | 8' | 1 | 2 | 192.5" |
| 18 | 4' | 6' | - | - | - | - | - | - | 8' | 2 | 2 | 216.5" |
| 20 | 4' | 8' | - | - | - | - | - | - | 8' | 2 | 2 | 240.5" |
| 22 | 6' | 8' | - | - | - | - | - | - | 8' | 2 | 2 | 264.5" |
| 24 | 8' | 8' | - | - | - | - | - | - | 8' | 2 | 2 | 288.5" |
| 26 | 4' | 6' | 8' | - | - | - | - | - | 8' | 3 | 2 | 312.5" |
| 28 | 4' | 8' | 8' | - | - | - | - | - | 8' | 3 | 2 | 336.5" |
| 30 | 6' | 8' | 8' | - | - | - | - | - | 8' | 3 | 2 | 360.5" |
| 32 | 8' | 8' | 8' | - | - | - | - | - | 8' | 3 | 2 | 384.5" |
| 34 | 4' | 6' | 8' | 8' | - | - | - | - | 8' | 4 | 2 | 408.5" |
| 36 | 4' | 8' | 8' | 8' | - | - | - | - | 8' | 4 | 2 | 432.5" |
| 38 | 6' | 8' | 8' | 8' | - | - | - | - | 8' | 4 | 2 | 456.5" |
| 40 | 8' | 8' | 8' | 8' | - | - | - | - | 8' | 4 | 2 | 480.5" |
| 42 | 4' | 6' | 8' | 8' | 8' | - | - | - | 8' | 5 | 2 | 504.5" |
| 44 | 4' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 | 2 | 528.5" |
| 46 | 6' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 | 2 | 552.5" |
| 48 | 8' | 8' | 8' | 8' | 8' | - | - | - | 8' | 5 | 2 | 576.5" |
| 50 | 4' | 6' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 2 | 600.5" |
| 52 | 4' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 2 | 624.5" |
| 54 | 6' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 2 | 648.5" |
| 56 | 8' | 8' | 8' | 8' | 8' | 8' | - | - | 8' | 6 | 2 | 672.5" |
| 58 | 4' | 6' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 2 | 696.5" |
| 60 | 4' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 2 | 720.5" |
| 62 | 6' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 2 | 744.5" |
| 64 | 8' | 8' | 8' | 8' | 8' | 8' | 8' | - | 8' | 7 | 2 | 768.5" |
| 66 | 4' | 6' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 2 | 792.5" |
| 68 | 4' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 2 | 816.5" |
| 70 | 6' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 2 | 840.5" |
| 72 | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8' | 8 | 2 | 864.5" |

| | FIXTURE LENGTH | FEED DIMENSIONS |
|----|----------------|-----------------|
| 4' | 48.0" | 21.0" |
| 6' | 72.0" | 36.0" |
| 8' | 96.0" | 48.0" |

