

PRODUCT FEATURES

COMPACT FIXTURE HOUSING


Width: 2.0" Height: 3.5"

ONE-PIECE EXTRUDED ALUMINUM HOUSING

Housing ensures straighter rows and consistent lens retention

120/277VAC 0-10 VOLT DIMMING TO 1% STANDARD

UP TO 112.5 LUMENS PER WATT AT 90 CRI

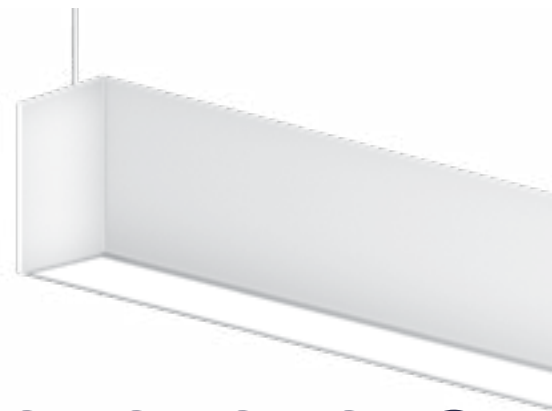

ORDERING GUIDE EX: 2S - 20 - HD - 30 - UNV - T1 - WH - C90

SERIES	LENGTH	OUTPUT				CCT	VOLTAGE		MOUNTING				FINISH		
2S															
ORDERING NOTES	XX FT	VHD	1250 LM/FT	LD	500 LM/FT	30	3000K	UNV	120-277V	T1	1" T Grid	HC	Hard Ceiling	WH	White
	1' Increments EX: 20' = 20	HD	1000 LM/FT	VLD	250 LM/FT	35	3500K	347 ¹	347V	T9	9/16" T Grid	JB	Junction Box	BLK	Black
		MD	750 LM/FT	CD	Custom	40	4000K			SC	Screw Slot				

1. LM NOT AVAILABLE WITH 347V

ORDERING NOTES


- EM NOT AVAILABLE WITH 347V.
- EM AND SENSORS ARE NOT AVAILABLE WITH 2' AND 3' FIXTURES.
- FOR INDIVIDUAL FIXTURES, SENSOR LOCATED AT POWER FEED END. FOR RUNS, A SENSOR IS INSTALLED INTO EACH FIXTURE IN RUN, EX. 2 SENSORS ARE INSTALLED IN A 16' RUN (1 SENSOR IN EACH 8' FIXTURE).

OPTIONS

CRI	SUSPENSION	INTEGRATED CONTROLS ^{2,3,4}		FOR INDIVIDUALS	FOR LINEAR RUNS ^{5,6}		
C90					EM		
C90 90 CRI	BLANK = 48" CABLE	DOS Daylight Occupancy Sensor DALI DRIVER STANDARD		EM ² Emergency Battery CEC LISTED	EMERGENCY BATTERY PACK	QUANTITY PER RUN ⁶	POSITION IN RUN ⁶
	CB96 96" Cables			EC Emergency Circuit	EC		
	CB144 144" Cables				EMERGENCY CIRCUIT	QUANTITY PER RUN ⁶	POSITION IN RUN ⁶
	BC Black Canopy & Cord						


OPTIONS NOTES

- CONSULT FACTORY FOR COMPONENT OR SYSTEM NOT LISTED.
- EM AND EC QUANTITY IS NOT TO EXCEED NUMBER OF DISCRETE FIXTURE SECTIONS IN A ROW.
- EM AND EC POSITION REFERS TO WHICH FIXTURE IN THE RUN THAT WILL BE POWERED BY THE EM/EC CIRCUIT.
POSITION OPTIONS: S=STARTER, J=JOINER, E=ENDER
EX: 2S-20-HD-35-UNV-T1-WH-EM2SJ



PHOTOMETRICS

2S-04-HD-35-UNV-XX-C90
Total Lumens: 4,055
Ratio: 0% Up & 100% Down
Wattage: 37.4
Efficacy: 108.4 LM/W
Fixture Length: Four Feet

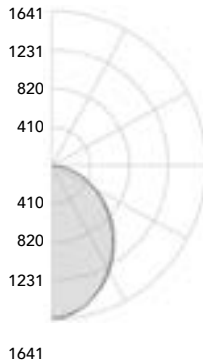

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1206.8	29.8
0 - 40	1923.4	47.4
0 - 60	3247.4	80.1
0 - 90	4054.6	100.0
90 - 180	0.2	0.0
0 - 180	4054.8	100.0

ENERGY CONSUMPTION WATTS PER LINEAR FOOT

DIRECT (LAMBERTIAN) LIGHT AT 90 CRI, 3500K

	VHD:1250	HD:1000	MD:750	LD:500	VLD:250
W/FT	11.5	9.4	6.9	4.4	2.3
LM/FT	1262	1014	779	492	250
LM/W	109.7	108.4	112.5	111.8	108.7

LUMEN ADJUSTMENT CALCULATIONS

LUMEN MULTIPLIER	
3000K	0.995
3500K	1.000
4000K	1.023

Example: MD Output, 3000K at 90CRI

Total Light Output: 3116 x 0.995 = 3100 lm
Total Light Output Per Foot: 779 x 0.995 = 775 lm/ft
Efficacy = 775 / 6.9 = 112.3 lm/W

OPERATION

Light Engine:

The 2S is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 90+.

Optics:

The back-lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The 2S comes standard with 0-10V dimming to 1%. For DOS (Daylight/Occupancy Sensor) ordering code, DALI driver required. Advance Xitanium SR, 1% dimming to be utilized.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. Standard battery is CEC Listed. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) Year limited warranty from date of shipment.

Lumen Maintenance:

Rated for 85% initial lumen output at 90,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Shipping:


2 week lead time for White (WH) or Black (BLK) finish orders up to 1000 feet. Lead time for orders greater than 1000 linear feet will be determined at time of order.

Manufactured in the USA:


All ALL Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.

MOUNTING DETAILS


SECTION




SINGLE FEED CANOPY




DUAL FEED CANOPY



JB HANGER CANOPY



HANGER CANOPY (T1, T9, SC, HC)



MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment, and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

Alignment/Assembly:

The alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, while a draw-screw secures housing-to-housing attachment. Additional alignment biscuits double as the light shields.

Lengths:

The 2S is available in a minimum 2-foot (nominal) length with additional 1-foot increments available ($\pm 0.030"$, $\pm 0.50"$). Longer fixture rows are available and will be configured with 4-foot, 5-foot, 6-foot, 7-foot, and 8-foot fixtures. Maximum run length on one power feed is 72'. Continuous runs over 72' will require a second feed.

Mounting Method/Hardware:

The 2S is available for mounting upon any ceiling type, additional mounting hardware available by others.

Exterior Finish:

The 2S is available in White and Black polyester powder coat finish to ensure durability.

Suspension Components:


The Hidden Connect design recesses or hides attachment hardware at the fixture. Fixtures are suspended by 1/16" galvanized aircraft cable. Cables are attached to the ceiling suspension point with a 1/4-20 threaded ceiling cable barrel that incorporates a threaded ring to support the feed/hanger canopy allowing access to the J-box/hanger without removal of the suspension cable allowing conductor inspection/service without having to support the fixture(s). Feed canopies are 5" O.D. and hanger canopies are 2" O.D. (JB Option = 5" O.D.) Cable lengths can be specified for 48", 96" and 144" suspension lengths. Ceiling type options are "T1" T-grid, "T9" T-grid, "SC" screw slot grid, "HC" hard ceiling or "JB" hard ceiling J-box mount.

Integrated Controls:

The 2S is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section. Philips EasySense is standard daylight/occupancy sensor. DALI driver required. If your project requires a component or system not listed, please contact your local American Linear Lighting representative.


MANUFACTURER	ORDERING CODE	SENSOR	CONNECTION	DRIVER
Philips EasySense	DOS	Daylight/PIR Occupancy	Wireless	DALI (Advanced Xitanium SR, 1% Dimming)

FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 3' - 4' - 5' - 6' - 7' - 8' - 9' - 10' - 11' - 12'

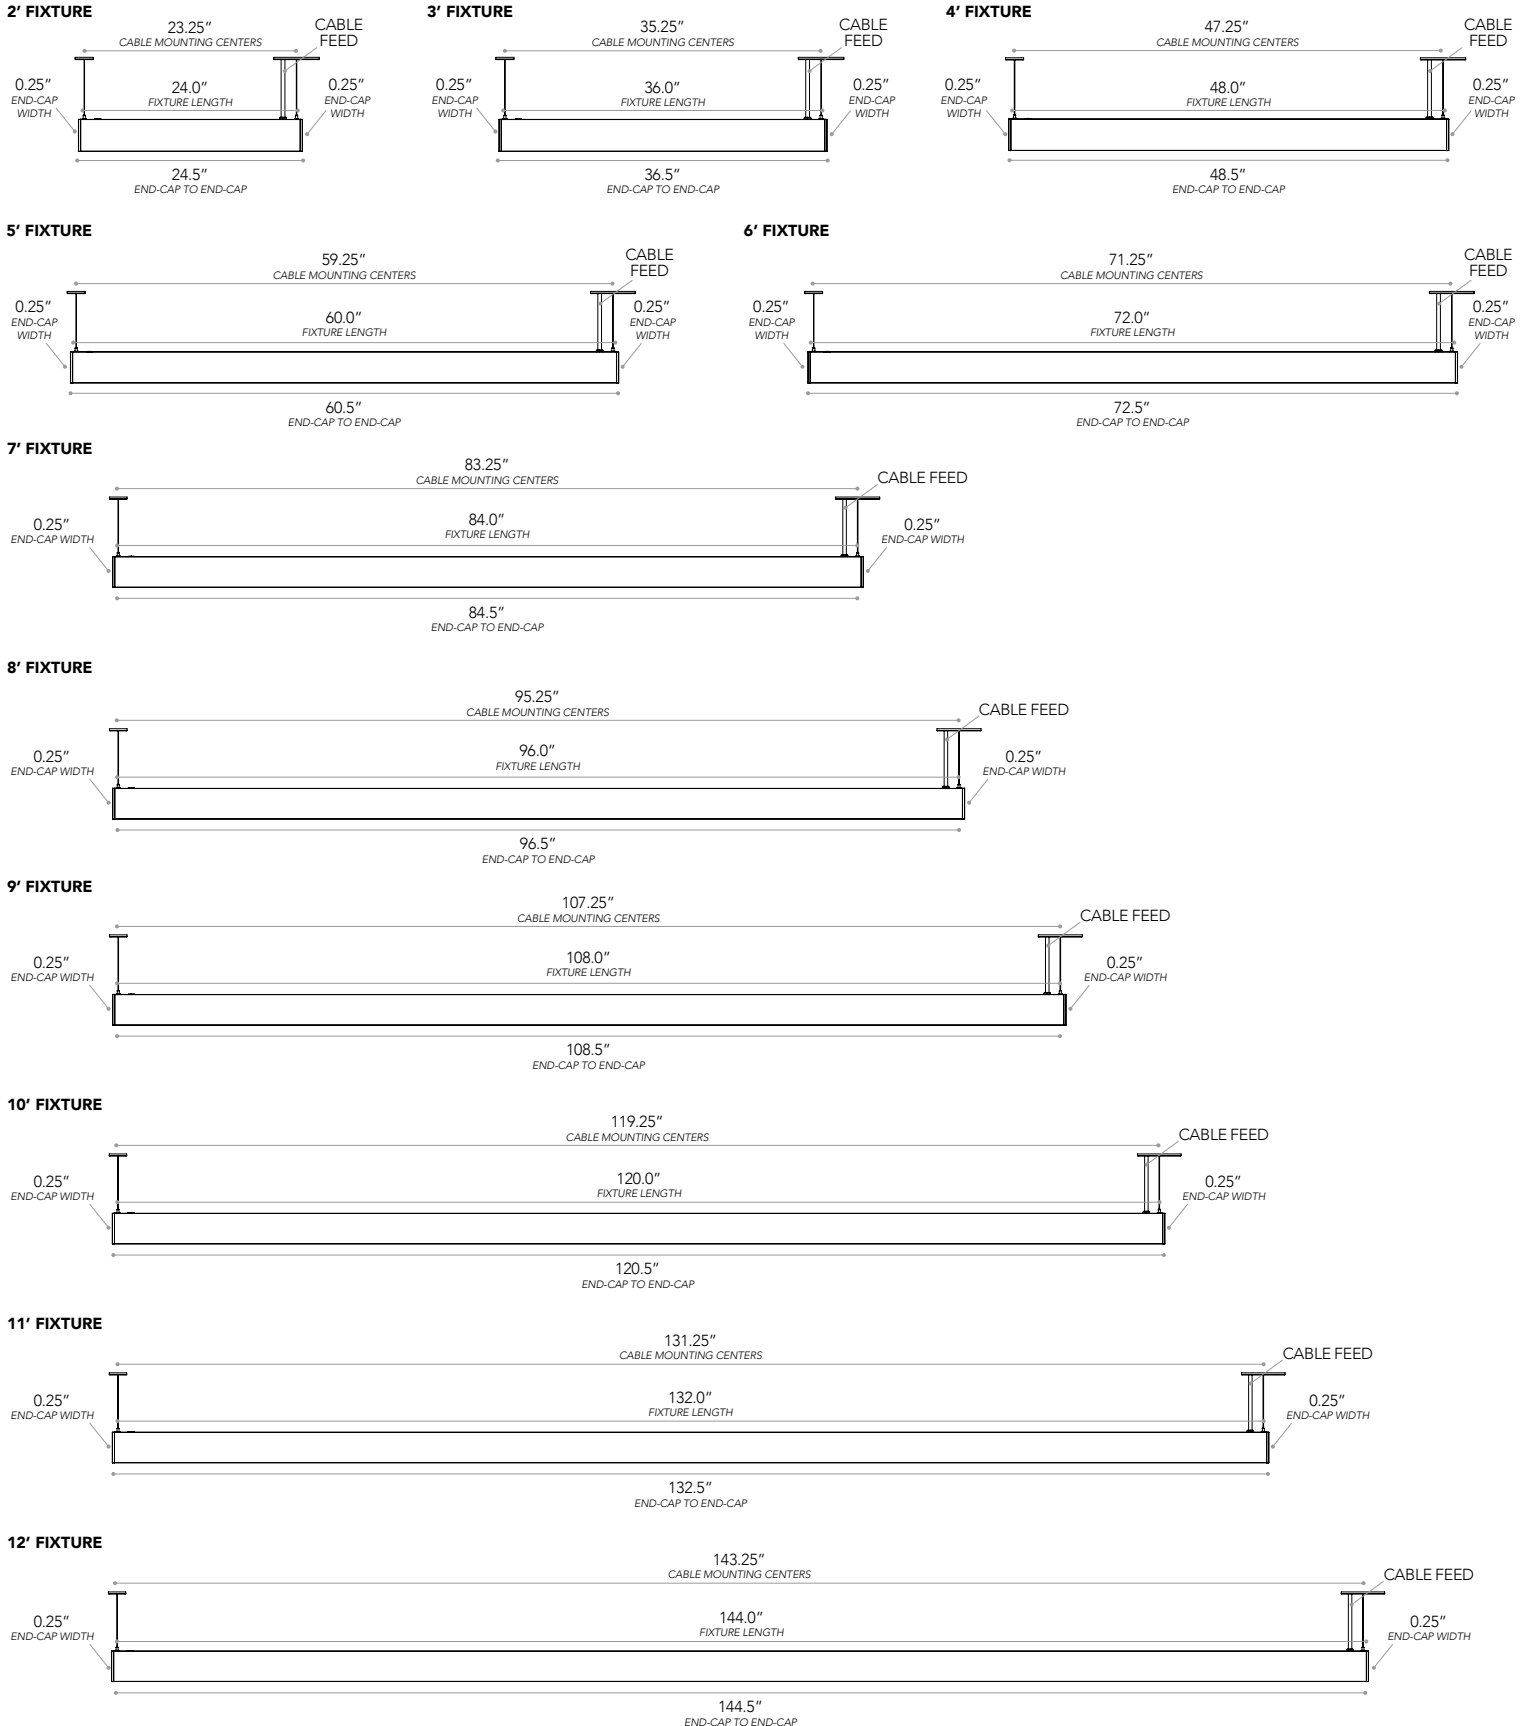


FIXTURE ROW LAYOUT: TWO UNITS 14' - 16'

14' FIXTURE

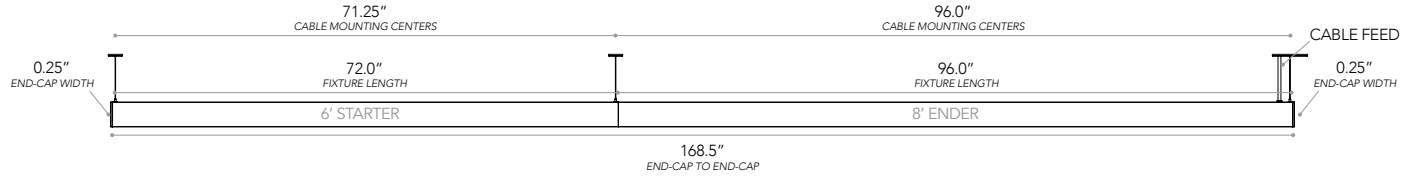


16' FIXTURE

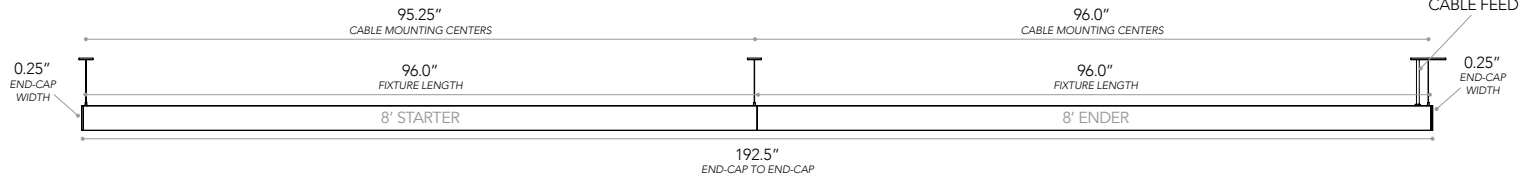


FIXTURE ROW LAYOUT: THREE UNITS 18' - 20' - 22' - 24'


18' FIXTURE

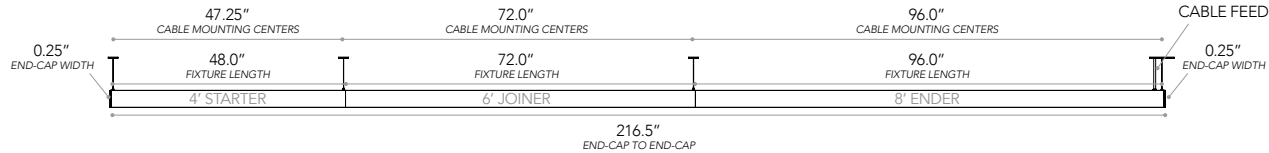


20' FIXTURE

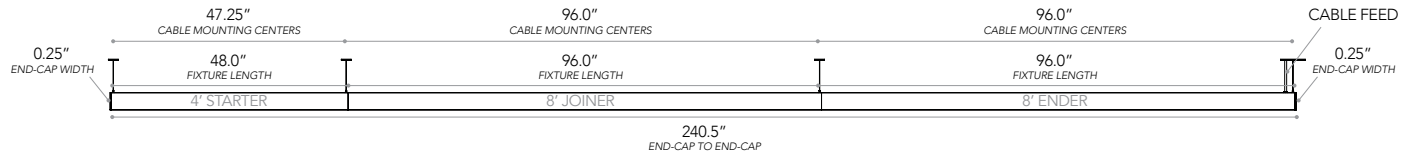

22' FIXTURE

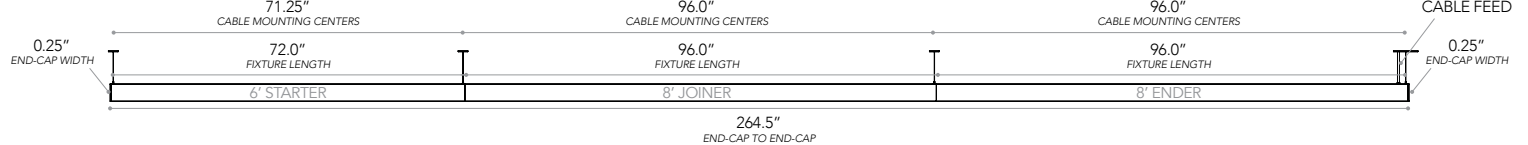

24' FIXTURE

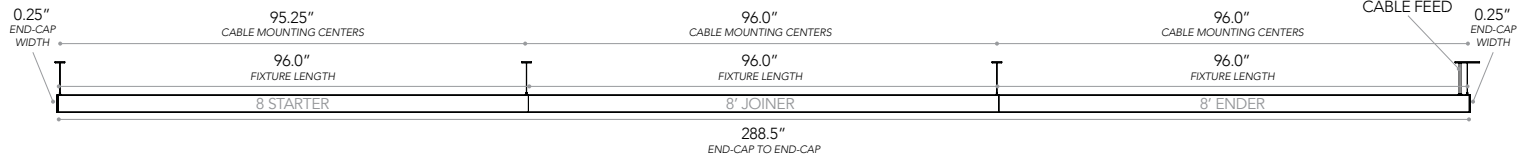

FIXTURE ROW COMPONENTS

RUN LENGTH	FIXTURE LENGTHS									JOINER	FEED KITS	HANGER KITS	END-CAP TO END-CAP
	STARTER	JOINER							ENDER				
	1	2	3	4	5	6	7	8	9				
13'	5'	-	-	-	-	-	-	-	8'	1	1	2	156.5"
14'	6'	-	-	-	-	-	-	-	8'	1	1	2	168.5"
15'	7'	-	-	-	-	-	-	-	8'	1	1	2	180.5"
16'	8'	-	-	-	-	-	-	-	8'	1	1	2	192.5"
17'	3'	6'	-	-	-	-	-	-	8'	2	1	3	204.5"
18'	4'	6'	-	-	-	-	-	-	8'	2	1	3	216.5"
19'	5'	6'	-	-	-	-	-	-	8'	2	1	3	228.5"
20'	4'	8'	-	-	-	-	-	-	8'	2	1	3	240.5"
21'	5'	8'	-	-	-	-	-	-	8'	2	1	3	252.5"
22'	6'	8'	-	-	-	-	-	-	8'	2	1	3	264.5"
23'	7'	8'	-	-	-	-	-	-	8'	2	1	3	276.5"
24'	8'	8'	-	-	-	-	-	-	8'	2	1	3	288.5"
25'	5'	6'	6'	-	-	-	-	-	8'	3	1	4	300.5"
26'	4'	6'	8'	-	-	-	-	-	8'	3	1	4	312.5"
27'	5'	6'	8'	-	-	-	-	-	8'	3	1	4	324.5"
28'	4'	8'	8'	-	-	-	-	-	8'	3	1	4	336.5"
29'	5'	8'	8'	-	-	-	-	-	8'	3	1	4	348.5"
30'	6'	8'	8'	-	-	-	-	-	8'	3	1	4	360.5"
31'	7'	8'	8'	-	-	-	-	-	8'	3	1	4	372.5"
32'	8'	8'	8'	-	-	-	-	-	8'	3	1	4	384.5"
33'	5'	6'	6'	8'	-	-	-	-	8'	4	1	5	396.5"
34'	4'	6'	8'	8'	-	-	-	-	8'	4	1	5	408.5"
35'	5'	6'	8'	8'	-	-	-	-	8'	4	1	5	420.5"
36'	4'	8'	8'	8'	-	-	-	-	8'	4	1	5	432.5"
37'	5'	8'	8'	8'	-	-	-	-	8'	4	1	5	444.5"
38'	6'	8'	8'	8'	-	-	-	-	8'	4	1	5	456.5"
39'	7'	8'	8'	8'	-	-	-	-	8'	4	1	5	468.5"
40'	8'	8'	8'	8'	-	-	-	-	8'	4	1	5	480.5"
41'	5'	6'	6'	8'	8'	-	-	-	8'	5	1	6	492.5"
42'	4'	6'	8'	8'	8'	-	-	-	8'	5	1	6	504.5"
43'	5'	6'	8'	8'	8'	-	-	-	8'	5	1	6	516.5"
44'	4'	8'	8'	8'	8'	-	-	-	8'	5	1	6	528.5"
45'	5'	8'	8'	8'	8'	-	-	-	8'	5	1	6	540.5"
46'	6'	8'	8'	8'	8'	-	-	-	8'	5	1	6	552.5"
47'	7'	8'	8'	8'	8'	-	-	-	8'	5	1	6	564.5"
48'	8'	8'	8'	8'	8'	-	-	-	8'	5	1	6	576.5"
49'	5'	6'	6'	8'	8'	8'	-	-	8'	6	1	7	588.5"
50'	4'	6'	8'	8'	8'	8'	-	-	8'	6	1	7	600.5"
51'	5'	6'	8'	8'	8'	8'	-	-	8'	6	1	7	612.5"
52'	4'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	624.5"
53'	5'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	636.5"
54'	6'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	648.5"
55'	7'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	660.5"
56'	8'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	672.5"
57'	5'	6'	6'	8'	8'	8'	8'	-	8'	7	1	8	684.5"
58'	4'	6'	8'	8'	8'	8'	8'	-	8'	7	1	8	696.5"
59'	5'	6'	8'	8'	8'	8'	8'	-	8'	7	1	8	708.5"
60'	4'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	720.5"
61'	5'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	732.5"
62'	6'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	744.5"
63'	7'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	756.5"
64'	8'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	768.5"
65'	5'	6'	6'	8'	8'	8'	8'	8'	8'	8	1	9	780.5"
66'	4'	6'	8'	8'	8'	8'	8'	8'	8'	8	1	9	792.5"
67'	5'	6'	8'	8'	8'	8'	8'	8'	8'	8	1	9	804.5"
68'	4'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	816.5"
69'	5'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	828.5"
70'	6'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	840.5"
71'	7'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	852.5"
72'	8'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	864.5"

	FIXTURE LENGTH		MOUNTING CENTERS	
	STARTER		STARTER	JOINER/ENDER
3'	36.0"		35.25"	-
4'	48.0"		47.25"	-
5'	60.0"		59.25"	-
6'	72.0"		71.25"	72.0"
7'	84.0"		83.25"	-
8'	96.0"		95.25"	96.0"

