



DATE

PROJECT

COMMENTS

PRODUCT FEATURES

FIXTURE HOUSING


Width: 5.0" Height: 3.5"

ONE-PIECE EXTRUDED ALUMINUM HOUSING

Housing ensures straighter rows and consistent lens retention

120/277VAC 0-10 VOLT DIMMING TO 1% STANDARD

UP TO 144.1 LUMENS PER WATT AT 90 CRI

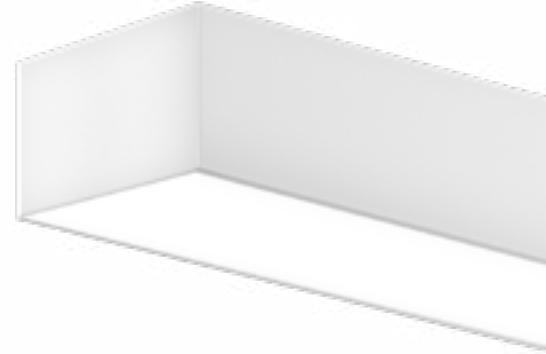

ORDERING GUIDE EX: 5C - 20 - HD - 30 - UNV - WH - C90

SERIES	LENGTH	OUTPUT	CCT	VOLTAGE	FINISH
5C	XX FT	VHD 1250 LM/FT	30 3000K	UNV 120-277V	WH White
	1' Increments EX: 20' = 20	HD 1000 LM/FT	35 3500K	347¹ 347V	BLK Black
		MD 750 LM/FT	40 4000K		
		LD 500 LM/FT			
		VLD 250 LM/FT			
		CD Custom			

ORDERING NOTES


- EM NOT AVAILABLE WITH 347V.
- EM AND SENSORS NOT AVAILABLE WITH 2' AND 3' FIXTURES.
- FOR INDIVIDUAL FIXTURES, SENSOR LOCATED AT POWER FEED END. FOR RUNS, A SENSOR IS INSTALLED INTO EACH FIXTURE IN RUN, EX. 2 SENSORS ARE INSTALLED IN A 16 FT RUN (1 SENSOR IN EACH 8 FT FIXTURE).

OPTIONS

CRI	INTEGRATED CONTROLS ^{2,3,4}	FOR INDIVIDUALS	FOR LINEAR RUNS ^{5,6}												
C90															
C90 90 CRI	DOS Daylight Occupancy Sensor DALI DRIVER STANDARD	EM² Emergency Battery CEC LISTED	<table border="1"> <thead> <tr> <th>EM</th> <th>QUANTITY PER RUN⁵</th> <th>POSITION IN RUN⁶</th> </tr> </thead> <tbody> <tr> <td>EMERGENCY BATTERY PACK</td> <td></td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>EC</th> <th>QUANTITY PER RUN⁵</th> <th>POSITION IN RUN⁶</th> </tr> </thead> <tbody> <tr> <td>EMERGENCY CIRCUIT</td> <td></td> <td></td> </tr> </tbody> </table>	EM	QUANTITY PER RUN ⁵	POSITION IN RUN ⁶	EMERGENCY BATTERY PACK			EC	QUANTITY PER RUN ⁵	POSITION IN RUN ⁶	EMERGENCY CIRCUIT		
EM	QUANTITY PER RUN ⁵	POSITION IN RUN ⁶													
EMERGENCY BATTERY PACK															
EC	QUANTITY PER RUN ⁵	POSITION IN RUN ⁶													
EMERGENCY CIRCUIT															


EMERGENCY OPTION NOTES

- CONSULT FACTORY FOR COMPONENT OR SYSTEM NOT LISTED.
- EM AND EC QUANTITY IS NOT TO EXCEED NUMBER OF DISCRETE FIXTURE SECTIONS IN A ROW.
- EM AND EC POSITION REFERS TO WHICH FIXTURE IN THE RUN THAT WILL BE POWERED BY THE EM/EC CIRCUIT. POSITION OPTIONS: **S**=STARTER, **J**=JOINER, **E**=ENDER
EX: 5C-20-HD-35-UNV-WH-EM2SJ



PHOTOMETRICS

5C-04-HD-35-UNV-XX-C90 1565
 Total Lumens: 4,092
 Ratio: 0% Up and 100% Down
 Wattage: 28.4
 Efficacy: 144.1 LM/W
 Fixture Length: Four Feet



Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	1173.3	28.7
0 - 40	1888.1	46.1
0 - 60	3240.2	79.2
0 - 90	4091.3	100.0
90 - 180	0.6	0.0
0 - 180	4091.9	100.0

ENERGY CONSUMPTION WATTS PER LINEAR FOOT

DIRECT (LAMBERTIAN) LIGHT AT 90 CRI

	VHD:1250	HD:1000	MD:750	LD:500	VLD:250
W/FT	9.0	7.1	5.4	3.7	2.0
LM/FT	1268	1023	753	505	264
LM/W	140.9	144.1	139.4	136.5	134.7

OPERATION

Light Engine:

The 5C is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 90+.

Optics:

The back-lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

Dimming:

The 5C comes standard with 0-10V dimming to 1%. For DOS (Daylight/Occupancy Sensor) ordering code, DALI driver required. Advance Xitanium SR, 1% dimming to be utilized.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. Standard battery is CEC Listed. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) Year limited warranty from date of shipment.


Lumen Maintenance:

Rated for 85% initial lumen output at 90,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

MOUNTING DETAILS

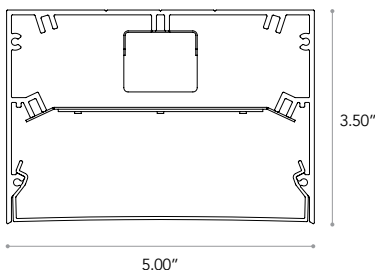

MECHANICAL

Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment, and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalist look of this luminaire.

Alignment/Assembly:

The alignment system employs a six-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, two extended biscuits provide additional strength and a light shield, while two vertical draw-screws secures housing-to-housing attachment.

Lengths:

The 5C is available in a minimum 2-foot (nominal) length with additional 1-foot increments available ($\pm 0.030"$, $\pm 0.50"$). Longer fixture rows are available and will be configured with 4-foot, 5-foot, 6-foot, 7-foot, and 8-foot fixtures. Maximum run length on one power feed is 72'. Continuous runs over 72' will require a second feed.

Mounting Method/Hardware:

The 5C is available for mounting upon any ceiling type, additional mounting hardware available by others.

Exterior Finish:

The 5C is available in White and Black polyester powder coat finish to ensure durability.

Integrated Controls:

The 5C is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section. Philips EasySense is standard daylight/occupancy sensor. DALI driver required. If your project requires a component or system not listed, please contact American Linear Lighting to review requirements.

MANUFACTURER	ORDERING CODE	SENSOR	CONNECTION	DRIVER
Philips EasySense	DOS	Daylight/PIR Occupancy	Wireless	DALI (Advanced Xitanium SR, 1% Dimming)


Shipping:

2-Week lead time for orders up to 1,000 Linear Feet. Lead time for orders greater than 1,000' will be determined at time of order.

Manufactured in the USA:


All ALL Luminaires and Components (except LED boards, drivers, and end caps) are proudly manufactured and assembled in the USA.

FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 3' - 4' - 5' - 6' - 7' - 8' - 9' - 10' - 11' - 12'

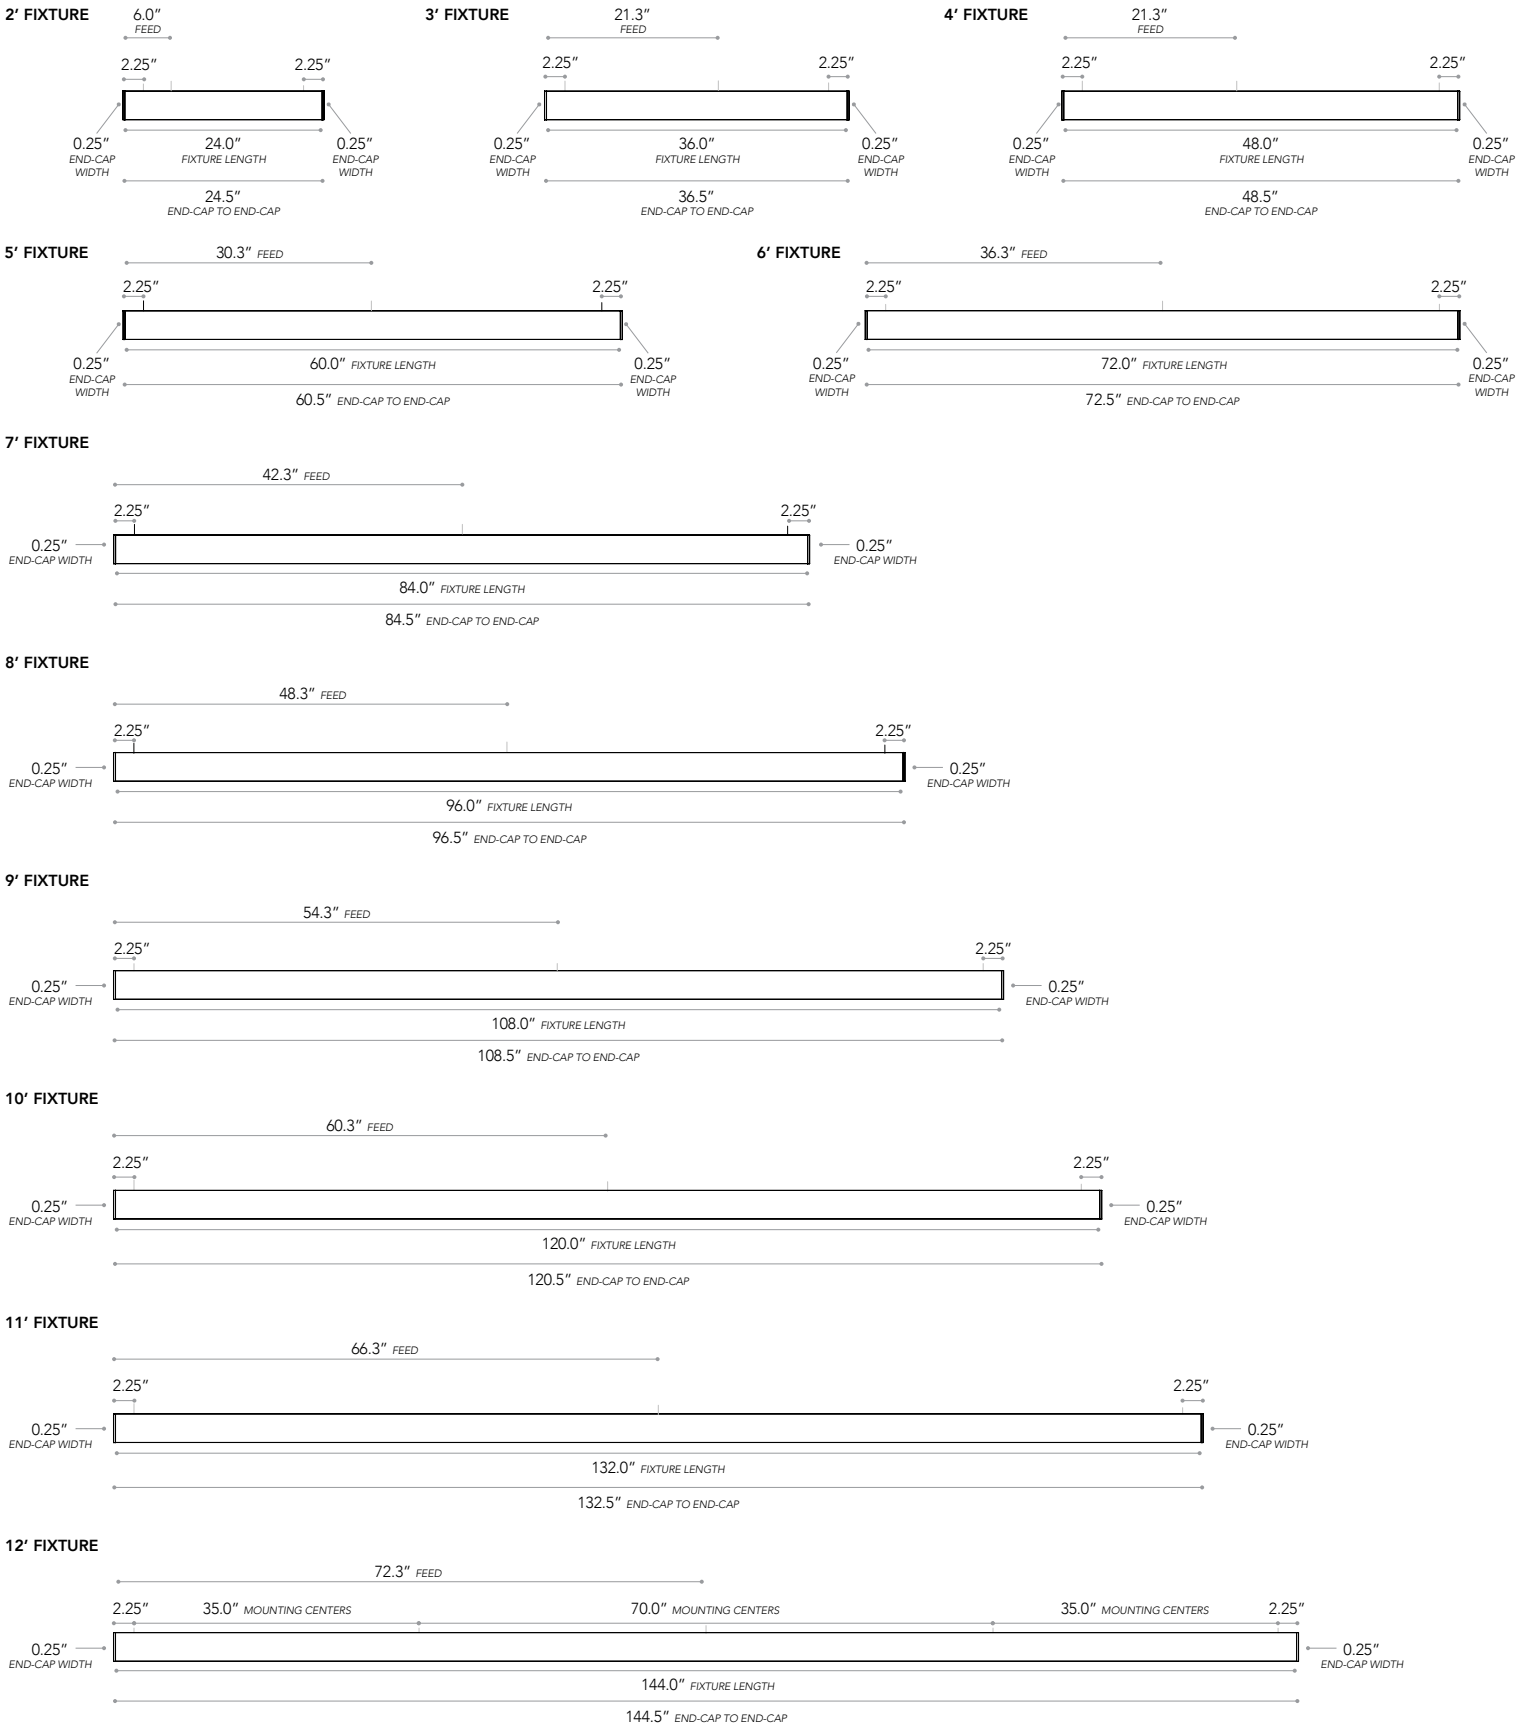


FIXTURE ROW LAYOUT: TWO UNITS 14' - 16'

14' FIXTURE

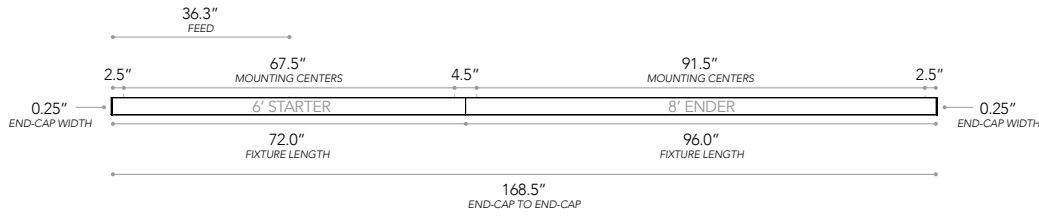


16' FIXTURE

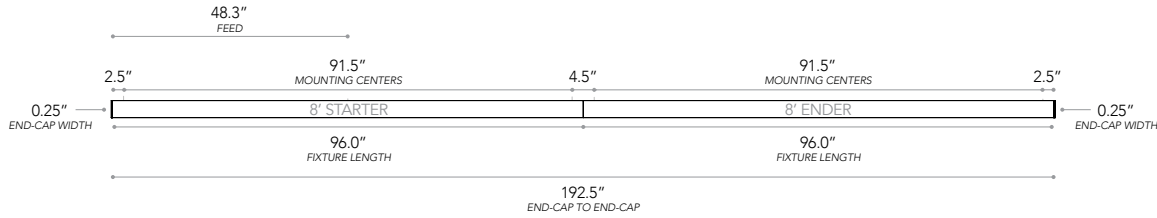


FIXTURE ROW LAYOUT: THREE UNITS 18' - 20' - 22' - 24'


18' FIXTURE

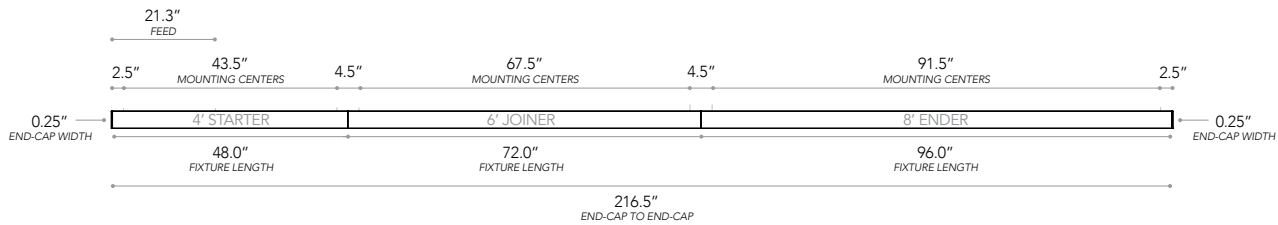


20' FIXTURE

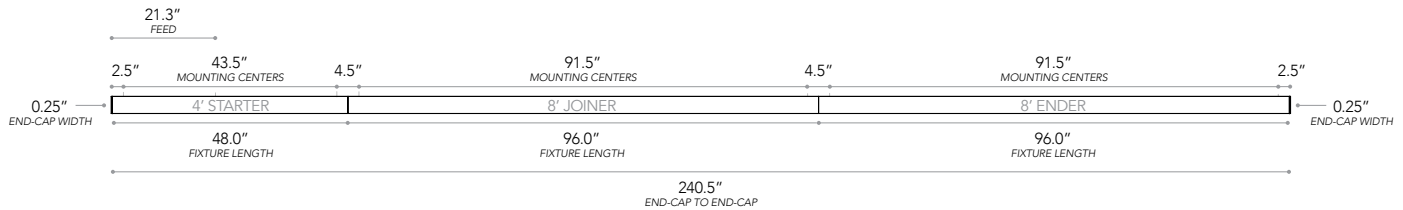

22' FIXTURE

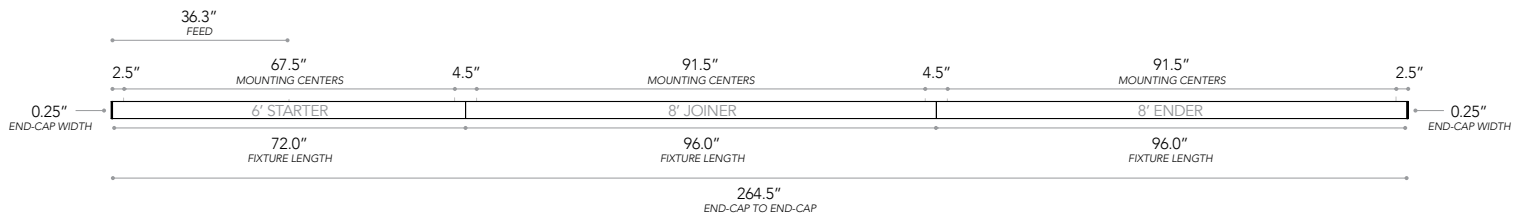

24' FIXTURE

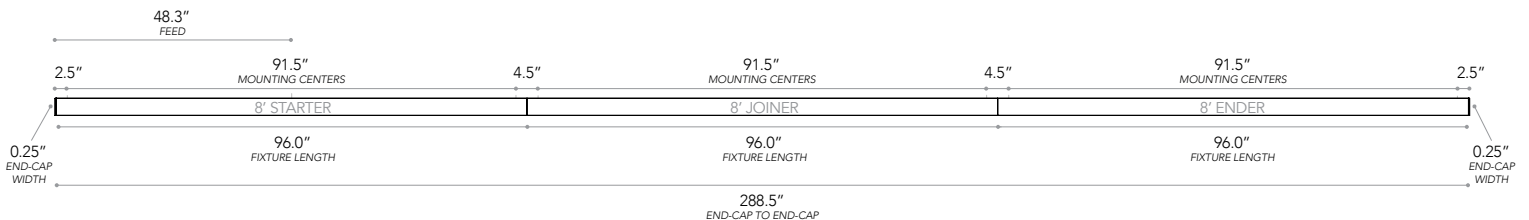

FIXTURE ROW COMPONENTS

RUN LENGTH	FIXTURE LENGTHS									JOINER KITS	END-CAP TO END-CAP
	STARTER	JOINER							ENDER		
	1	2	3	4	5	6	7	8	9		
14'	6'	-	-	-	-	-	-	-	8'	1	168.5"
15'	7'	-	-	-	-	-	-	-	8'	1	180.5"
16'	8'	-	-	-	-	-	-	-	8'	1	192.5"
17'	3'	6'	-	-	-	-	-	-	8'	2	204.5"
18'	4'	6'	-	-	-	-	-	-	8'	2	216.5"
19'	5'	6'	-	-	-	-	-	-	8'	2	228.5"
20'	4'	8'	-	-	-	-	-	-	8'	2	240.5"
21'	5'	8'	-	-	-	-	-	-	8'	2	252.5"
22'	6'	8'	-	-	-	-	-	-	8'	2	264.5"
23'	7'	8'	-	-	-	-	-	-	8'	2	276.5"
24'	8'	8'	-	-	-	-	-	-	8'	2	288.5"
25'	5'	6'	6'	-	-	-	-	-	8'	3	300.5"
26'	4'	6'	8'	-	-	-	-	-	8'	3	312.5"
27'	5'	6'	8'	-	-	-	-	-	8'	3	324.5"
28'	4'	8'	8'	-	-	-	-	-	8'	3	336.5"
29'	5'	8'	8'	-	-	-	-	-	8'	3	348.5"
30'	6'	8'	8'	-	-	-	-	-	8'	3	360.5"
31'	7'	8'	8'	-	-	-	-	-	8'	3	372.5"
32'	8'	8'	8'	-	-	-	-	-	8'	3	384.5"
33'	5'	6'	6'	8'	-	-	-	-	8'	4	396.5"
34'	4'	6'	8'	8'	-	-	-	-	8'	4	408.5"
35'	5'	6'	8'	8'	-	-	-	-	8'	4	420.5"
36'	4'	8'	8'	8'	-	-	-	-	8'	4	432.5"
37'	5'	8'	8'	8'	-	-	-	-	8'	4	444.5"
38'	6'	8'	8'	8'	-	-	-	-	8'	4	456.5"
39'	7'	8'	8'	8'	-	-	-	-	8'	4	468.5"
40'	8'	8'	8'	8'	-	-	-	-	8'	4	480.5"
41'	5'	6'	6'	8'	8'	-	-	-	8'	5	492.5"
42'	4'	6'	8'	8'	8'	-	-	-	8'	5	504.5"
43'	5'	6'	8'	8'	8'	-	-	-	8'	5	516.5"
44'	4'	8'	8'	8'	8'	-	-	-	8'	5	528.5"
45'	5'	8'	8'	8'	8'	-	-	-	8'	5	540.5"
46'	6'	8'	8'	8'	8'	-	-	-	8'	5	552.5"
47'	7'	8'	8'	8'	8'	-	-	-	8'	5	564.5"
48'	8'	8'	8'	8'	8'	-	-	-	8'	5	576.5"
49'	5'	6'	6'	8'	8'	8'	-	-	8'	6	588.5"
50'	4'	6'	8'	8'	8'	8'	-	-	8'	6	600.5"
51'	5'	6'	8'	8'	8'	8'	-	-	8'	6	612.5"
52'	4'	8'	8'	8'	8'	8'	-	-	8'	6	624.5"
53'	5'	8'	8'	8'	8'	8'	-	-	8'	6	636.5"
54'	6'	8'	8'	8'	8'	8'	-	-	8'	6	648.5"
55'	7'	8'	8'	8'	8'	8'	-	-	8'	6	660.5"
56'	8'	8'	8'	8'	8'	8'	-	-	8'	6	672.5"
57'	5'	6'	6'	8'	8'	8'	8'	-	8'	7	684.5"
58'	4'	6'	8'	8'	8'	8'	8'	-	8'	7	696.5"
59'	5'	6'	8'	8'	8'	8'	8'	-	8'	7	708.5"
60'	4'	8'	8'	8'	8'	8'	8'	-	8'	7	720.5"
61'	5'	8'	8'	8'	8'	8'	8'	-	8'	7	732.5"
62'	6'	8'	8'	8'	8'	8'	8'	-	8'	7	744.5"
63'	7'	8'	8'	8'	8'	8'	8'	-	8'	7	756.5"
64'	8'	8'	8'	8'	8'	8'	8'	-	8'	7	768.5"
65'	5'	6'	6'	8'	8'	8'	8'	8'	8'	8	780.5"
66'	4'	6'	8'	8'	8'	8'	8'	8'	8'	8	792.5"
67'	5'	6'	8'	8'	8'	8'	8'	8'	8'	8	804.5"
68'	4'	8'	8'	8'	8'	8'	8'	8'	8'	8	816.5"
69'	5'	8'	8'	8'	8'	8'	8'	8'	8'	8	828.5"
70'	6'	8'	8'	8'	8'	8'	8'	8'	8'	8	840.5"
71'	7'	8'	8'	8'	8'	8'	8'	8'	8'	8	852.5"
72'	8'	8'	8'	8'	8'	8'	8'	8'	8'	8	864.5"

	FIXTURE LENGTH	FEED DIMENSIONS
3'	36.0"	21.0"
4'	48.0"	21.0"
5'	60.0"	30.0"
6'	72.0"	36.0"
7'	84.0"	42.0"
8'	96.0"	48.0"

